

Cabeza avellanada




**Tornillo DIN 7991 clase 10.9 Pavonado.**

Tornillo de cabeza avellanada con hexagono interior.

Acabado: Pavonado.

L (mm)	M-3 Ø	M-4 Ø	M-5 Ø	M-6 Ø	M-8 Ø	M-10 Ø	M-12 Ø	M-14 Ø	M-16 Ø	M-20 Ø
8	X									
10	X	X	X	X						
12	X	X	X	X	X					
16	X	X	X	X	X	X	X			
20	X	X	X	X	X	X	X			
25	X	X	X	X	X	X	X			
30	X	X	X	X	X	X	X	X	X	X
35		X	X	X	X	X	X	X	X	X
40		X	X	X	X	X	X	X	X	X
40		X	X	X	X	X	X	X	X	X
45		X	X	X	X	X	X	X	X	X
50		X	X	X	X	X	X	X	X	X
55				X	X	X	X	X	X	X
60				X	X	X	X	X	X	X
65				X	X	X	X	X	X	X
70				X	X	X	X	X	X	X
75				X	X	X	X	X	X	X
80				X	X	X	X	X	X	X
90				X	X	X	X	X	X	X
100				X	X	X	X	X	X	X
110				X	X	X	X	X	X	X
120				X	X	X	X	X	X	X
130									X	X
140									X	X
150									X	X

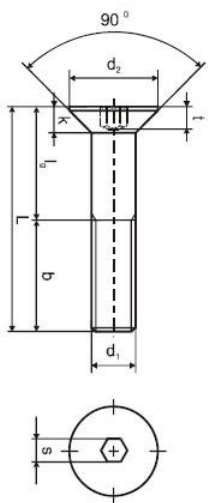


d (mm)	K (mm)	t (mm)	s (mm)	p (mm)
M-3	1,7	1,2	2	0,5
M-4	2,3	1,8	2,5	0,7
M-5	2,8	2,3	3	0,8
M-6	3,3	2,5	4	1
M-8	4,4	3,5	5	1,25
M-10	5,5	4,4	6	1,50
M-12	6,5	4,6	8	1,75
M-14	7	4,8	10	2
M-16	7,5	5,3	10	2
M-18	8	5,6	12	2,5
M-20	8,5	5,9	12	2,5
M-24	14	10,3	14	3

**p:** Paso de rosca  
**k:** Altura de cabeza  
**s:** Ancho de llave  
**d:** Métrica  
**L:** Longitud  
**t:** Profundidad



GARANTÍA FESIT



Pernos de cabeza avellanada con hexagono interior.

Norma DIN 7991

ISO 10642

