

TR



Tornillo para la reparación de chapa metálica sobre estructura previamente perforada


HEAD



KOLOR

Under order painted head.

For roofing fixing on steel support with predrill.

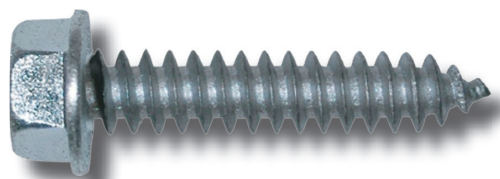

Tornillo de reparación TR.

Código Item	Medida Size D x L (mm)	Llave Drill bit (mm)	Min-Max T Fix (mm)		
				unds caja Qty box	unds cartón Qty carton
1100722	7x 22	10	-7	1.000	4.000
1100735	7x 35	10	10-20	1.000	4.000
1100780	7x 80	10	25-65	1.000	4.000
1107130	7x 130	10	75-115	1.000	4.000

GARANTÍA FESIT



Taladro previo
Pre-drilling



Llave 10
Drill bit 10




Velocidad de perforación:
800 rpm
Recommend
Speed 800 rpm

Tornillo de reparación con arandela EPDM Ø19 mm TR

Código Item	Medida Size D x L (mm)	Llave Drill bit (mm)	Min-Max T Fix (mm)		
				unds caja Qty box	unds cartón Qty carton
1190722	7x 22	10	-7	1.000	4.000
1190735	7x 35	10	10-17	1.000	4.000
1190780	7x 80	10	25-63	1.000	4.000
1197130	7x 130	10	75-112	1.000	4.000



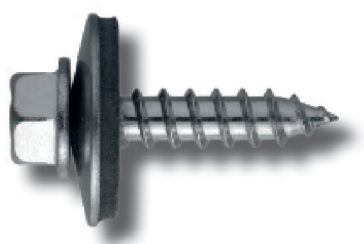

Tornillo de reparación TR inoxidable A2 AISI304

Código Item	Medida Size D x L(mm)	Llave Drill bit (mm)	Min-Max T Fix (mm)	unds caja Qty box	unds cartón Qty carton
1100725	7,2x 25	10	-10	1.000	4.000
1100750	8x 50	10	-35	1.000	4.000



Tornillo de reparación TR A2 AISI304 con arandela EPDM Ø25 mm

Código Item	Medida Size D x L(mm)	Llave Drill bit (mm)	Min-Max T Fix (mm)	unds caja Qty box	unds cartón Qty carton
1125725	7,2x 25	10	-6	1.000	4.000
1125750	8x 50	10	-31	1.000	4.000



TR A2



Tornillo para la reparación de chapa metálica sobre estructura previamente perforada

Under order painted head.

For roofing fixing on steel support with predrill.

HEAD



KOLOR

GARANTÍA FESIT



Taladro previo
Pre-drilling



Llave 10
Drill bit 10



Velocidad de perforación:
800 rpm
Recommend
Speed 800 rpm



Fesit
FIJACIONES ESPECIALES