



Fijación metálica **RESISTENTE AL FUEGO**

Fijación metálica para aislamiento MLN.



Accesorio **Disco Ø70 mm**

Código Item	Medida Size Ø x L (mm)	unds cartón Qty carton
7211900	8x 90	250
7211801	8x 110	250
7211802	8x 140	250
7211803	8x 170	250
7211804	8x 200	250
7211805	8x 250	250
7211806	8x 300	250
7211805	Disco Ø70	200

d+ l [mm]	d [mm]	td [mm]	hef [mm]	tfix [mm]	dr [mm]
8x 90	8	100	35	55	35
8x 110	8	120	35	75	35
8x 140	8	150	35	105	35
8x 170	8	180	35	135	35
8x 200	8	210	35	165	35
8x 250	8	260	35	215	35
8x 300	8	310	35	265	35

Resistencia / Load
Safety factor $\gamma_M = 2,52$

Ø8
[mm]

Hormigón / Concrete / Beton

C20/25


[kN]

0,34

Ladrillo macizo Solid brick/ Briques pleines

[kN]

0,08

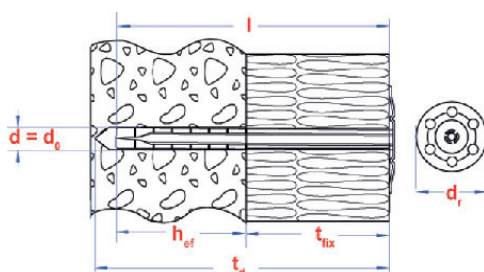

MLN

MLN, El sistema de fijación consiste en anclajes fabricado en chapa de acero galvanizado con alta resistencia mecánica.

Buena elasticidad, altamente resistente al impacto.

Diseñado para anclar material aislante a materiales de sustrato de hormigón y mampostería. Rápido y fácil de instalar.

Aprobado por CE: el producto cumple con EN14566: 2008 + A1: 2009

Resistencia al fuego probada a 120 min.

Adecuado para la fijación de paneles aislantes

Designed to anchor insulation material to concrete and masonry substrate materials. Quick and easy to install - drill 8mm hole, minimum of 10mm deeper than length of the anchor.

CE approved - product conforms to EN14566:2008+A1:2009

Fire rated tested to 120min

Suitable for fixing insulation boards

INVESTIGACIÓN
DESARROLLO
INNOVACIÓN



FESIT

Fesit
FIJACIONES ESPECIALES